

Uniclass L621
/ CI / SfB / / Yq2 /
November 2018

TECHNICAL INFORMATION

QUICK REPAIR CONCRETE

Ready-to-use Quick Repair Concrete Product Data Sheet



Blue Circle Quick Repair Concrete is a premixed, quick-setting concrete manufactured from cement, specially selected sand and admixtures.

When sprinkled with water it sets in approximately 30 minutes.

GENERAL INFORMATION

Blue Circle Quick Repair Concrete is suitable for all small concrete repair jobs, including floors, paths and paving, surface repair and edge finishing to a depth of 50 mm. It is premixed and ready to use, and only requires the addition of clean water. This product is manufactured to a third-party accredited BS EN 9001 Quality Management System.

WORKING TEMPERATURE

Do not use at temperatures below 5°C or above 30°C without taking precautions to ensure that new work is protected from freezing or drying out.

USE

- Dampen the area to be repaired or concreted ensuring that there is no standing water
- The premixed Quick Repair Concrete should be poured from the tub into the area to be repaired or concreted.
 The maximum recommended depth of Quick Repair Concrete is 50 mm
- Level the dry concrete using a straight-edge or trowel
- Sprinkle with water using a fine rose until wet, using a maximum of 3 litres of water per m² (do not allow pools of water to form)
- Compact the concrete using a straight-edge or float
- Re-wet the concrete 2 hours after the first application of water (for indoor conditions or in dry weather, a further application of water after 12 hours may be appropriate)
- Newly-finished concrete should always be protected from drying out by covering with polythene sheeting or wet hessian (sacking) for a minimum of 7 days
- Clean all tools and equipment immediately after use and before the material has set
- Blue Circle Quick Repair Concrete sets in about 30 minutes.





STORAGE AND SHELF LIFE

Blue Circle Quick Repair Concrete is a cement-based material and should be handled and stored with care. Information on the maximum storage period (shelf life) of the product is shown on the tub.

AVAILABILITY

Blue Circle Quick Repair Concrete is available in 2.5 kg tubs throughout the United Kingdom.

TECHNICAL SUPPORT

Further information and advice on this product and the full range of Tarmac Cement products can be obtained through the contacts listed below.


RESPONSIBLE SOURCING

This product has been externally assessed and awarded a 'Very Good' classification to the prestigious BES 6001, Responsible Sourcing Standard.



HEALTH AND SAFETY

Blue Circle Quick Repair Concrete contains cement; contact between cement and body fluids may cause irritation, dermatitis or burns. For further information, including control of soluble hexavalent chromium, refer to the appropriate Tarmac Cement Health and Safety Information Sheet.

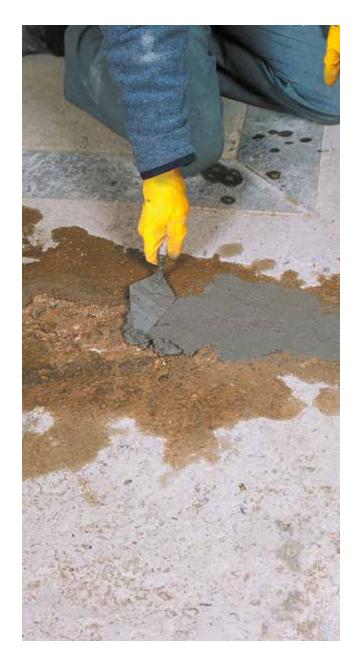

For further information
Technical helpdesk
Tel: 0845 812 6232
E-mail info-cement@tarmac.com
Customer services & sales

Tel: 0845 812 6300

E-mail customerservice@tarmac.com

'Tarmac' and the 'circle logo' are registered trademarks. ©2015 Tarmac Trading Limited

The information in this data sheet is accurate at the time of printing, but Tarmac reserves the right to amend details as part of its product development programme. The information given in this technical data sheet is based on our current knowledge and is intended to provide general notes on our products and their uses. Tarmac endeavour to ensure that the information given is accurate, but accept no liability for its use or its suitability for particular application because of the product being used by the third party without our supervision. Any existing intellectual property right must be observed.